

























College Park's Collection of Quality K3 Feet

FOOT	MOUNTING	WEIGHT LIMIT	SIZES	IMPACT	BUILD HEIGHT	HEEL HEIGHT	WEIGHT**	WARRANTY	L-CODE†	ENVIROSHIELD
 SOLEUS	Endo (4-hole)	220 lbs (21-24 cm) 250 lbs (25-26 cm) 275 lbs (27-30 cm)	21-30 cm		6.4-7.6 in	0.38 in	667 g	3	L5986 + L5987	 narrow & wide
 VELOCITY	Endo (IP)	250 lbs (25-26 cm) 275 lbs (27-30 cm)	25-30 cm		4.7-5.2 in	0.38 in	631 g	3	L5981 + L5986	 narrow & wide
 VENTURE	Endo (IP) Exo (ALX)	250 lbs (21-24 cm) 275 lbs (25-30 cm)*	21-30 cm		2.5-2.7 in (IP) 5.0-5.2 in (ALX)	0.38 in	585 g	3	L5981 + L5986	 narrow & wide
 TRUSTEP	Endo (IP) Exo (ALX)	300 lbs (Endo) 352 lbs (Exo)	22-31 cm		3.5 in (IP) 6.0 in (ALX)	0.5 in	678 g	3 18 mo / 300+ lbs		 narrow & wide
 TRIBUTE	Endo (IP)	220 lbs	21-30 cm		2.4 in	0.38 in	529 g	2	L5979	 standard narrow & wide
 HORIZON HD	Endo (IP)	330 lbs (21-25 cm) 365 lbs (26-30 cm)	21-30 cm		2.3 in	0.38 in	518 g	3	L5981	 standard
 HORIZON LT	Endo (IP)	220 lbs	21-30 cm		2.5 in	0.38 in	482 g	3	L5981	 standard
 ODYSSEY_{K3}	Endo (IP)	275 lbs	21-30 cm		3.4-3.6 in	0.38 in	750 g	3	L5981 + L5968	 standard

* Low impact only

**26 cm, including Enviroshell

†Caucasian, Tan, Brown, Jet Black


‡ The listing of codes with these products should not be construed as a guarantee for coverage or payment. Ultimate responsibility for the coding of services/products rests with the individual practitioner.

College Park designs and manufactures a full line of anatomically correct, custom built prosthetic solutions. College Park is ISO 13485: 2003 certified with an extensive focus on quality testing, and proudly sources and produces all products entirely in the USA. With precise engineering and quality manufacturing, College Park is committed to innovating human locomotion solutions for users all over the world.






Original and unrivaled, the Truststep sets the standard for unsurpassed comfort and natural-feeling mobility. It was the first to provide anatomically correct movement in all planes, allowing for nearly the same vertical motion, rotation and stability as an anatomical foot. With a full range of options available, the versatile design allows for complete customization.

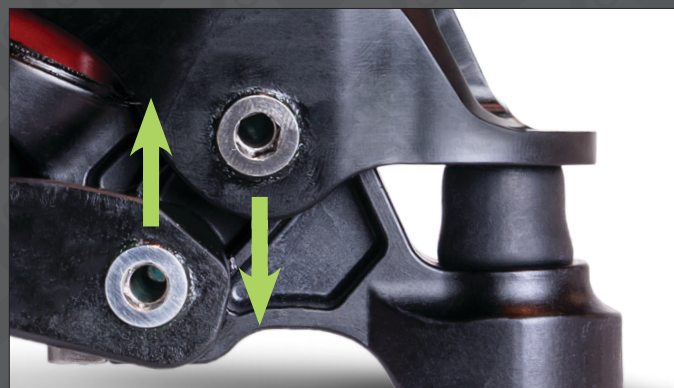

VERTICAL DISPLACEMENT

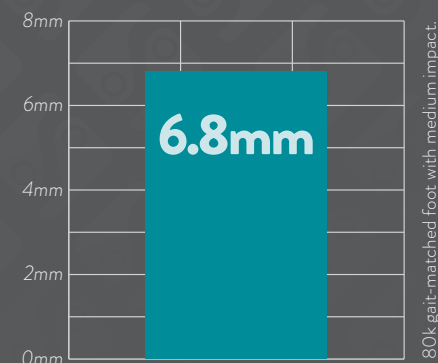

VERTICAL COMPLIANCE

The offset hinge points in the Truststep allow the foot to flex and absorb vertical forces just like an anatomical foot.



TRI-AXIAL TECHNOLOGY

True multi-axial movement occurs on all three planes. The superior plantar flexion, dorsiflexion, transverse rotation and inversion/eversion make the Truststep the most anatomically correct of any prosthetic foot —allowing for ease of movement, excellent ground compliance and comfort.



EVOLUTION


Since its release in 1991, the Truststep has undergone significant improvements as new technology emerges, such as aircraft-grade polymer bumpers for unbeatable durability, noise abatement features and a redesigned lighter, stronger heel.

ANATOMICAL LOCOMOTION


FROM HEEL STRIKE TO TOE-OFF.



On heel strike, the rear bumper compresses to bring the toe down to foot flat. This gives higher rates of ground contact on declines for firm footing.

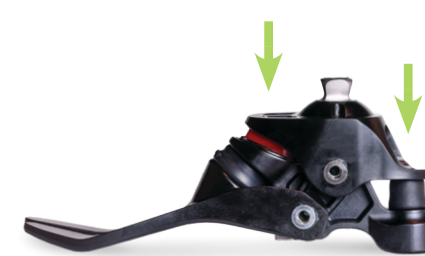

During midstance, the front and rear bumpers compress simultaneously to provide cushion. Dual hinge points allow the foot to maintain ground contact throughout the gait cycle.

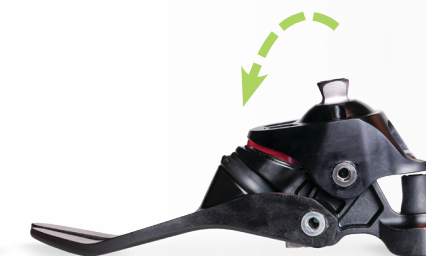

To ready the foot for a smooth toe-off, the Truststep's front bumper compresses to absorb impact and lift the heel. The rollover shape and curled toes assist in forward propulsion.



PATIENT TESTIMONIAL

"After I put my legs on in the morning, I don't take them off until I go to bed in the evening. I've been told that I have a great gait. As a longtime amputee, I've worn many legs, and it hasn't always been like that. I started wearing my Truststeps in 2001 and haven't looked back."

— Reggie, Truststep user
See more at college-park.com/testimonials

TECHNICAL SPECIFICATIONS

FUNCTION Tri-Axial	WEIGHT* 678 g
MOUNTING Endo (IP) Exo (ALX)	WARRANTY 3 years (18 mo. 300+ lbs)
SIZES 22-31 cm	IMPACT LEVEL L M H K3/4
WEIGHT LIMIT Endo (IP) 300 lbs (136 kg) Exo (ALX) 352 lbs (160 kg)	HEEL HEIGHT 0.5 in (13 mm)
BUILD HEIGHT Endo (IP) 3.5 in (8.7 cm) Exo (ALX) 6.0 in (15.2 cm)	ENVIROSHIELD®† C T B J narrow & wide

† Caucasian, Tan, Brown or Jet Black. *26 cm model, including Enviroshell.

