
SIZING OPTIONS FOR HEEL AND TOE WEDGES

(Shown at actual size)





Foot Size: 27-30cm

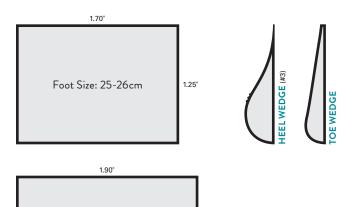



Prinsessegracht 20, 2514 AP
The Hague, Netherlands

1.25"


©2017 College Park Industries, Inc. All rights reserved. College Park is a registered trademark of College Park Industries, Inc.



Australian Sponsor EMERGO AUSTRALIA Level 20, Tower II, Darling Park 201 Sussex Street Sydney, NSW 2000 Australia


INSTRUCTION SHEET

VELOCITY WEDGE KIT

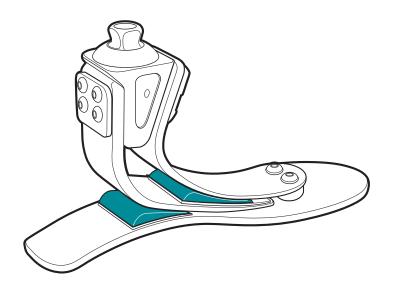

Heel and toe wedges are not required.
Follow these guidelines if a change in firmness is desired.

VELOCITY WEDGE PLACEMENT

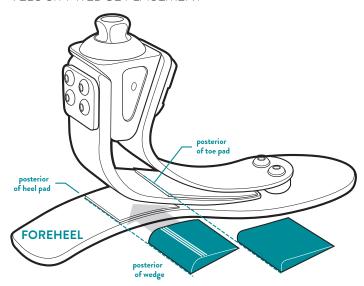

ADJUSTMENT OPTIONS FOR WEDGES

HEEL FIRMNESS	WEDGE#	INDICATORS
STANDARD	NONE	NONE
MEDIUM	1	
FIRM	2	II
X-FIRM	3	Ш
TOE FIRMNESS		
FIRMER	ADD TOE WEDGE	



WEDGE INSTALLATION AND REMOVAL

SEMI-PERMANENT BOND (INITIAL FITTING)

- Apply only the smallest amount of CA adhesive* (included) necessary to temporarily hold the wedge into position. Too much will inhibit removal.
- When installing the wedge, align posterior edges of the wedge and pad.
- 3 Press on the wedge and hold it for 15 seconds.

WEDGE REMOVAL

To remove the wedge without damage, pry it away with a finger or use a flat, blunt object such as a tongue depressor.

PERMANENT BOND (FINAL FITTING)

- Apply a thin line of CA adhesive* around the bottom perimeter of the wedge.
- When installing the wedge, align posterior edges of the wedge and pad.
- 3 Press on the wedge and hold it for 15 seconds.

NOTE: The wedge will NOT be removable once it has been bonded





ACAUTIONS

- Use only the correct size wedge in the foot (see back for sizing guide).
- Do not install more than one wedge into the heel or toe positions.
- Pre-installed toe wedge can not be removed.
- Place wedge only in the recommended position.
- Do not force the wedge further into the toe springs.
- Do not substitute other objects in place of recommended wedges.

^{*}Cyanoacrylate (CA) adhesive, included as part of the wedge kit.